




CERAMIC for LUXURY








# **Explore** the Creative **World of Ceramic Art**

Blackberry is a uprising manufacturer and exporter of all type of ceramic tiles. We are rooted in India, creating products in-line with contemporary trends of architecture to deliver excellent experiences and lavish all across the world with our voguish surfaces.

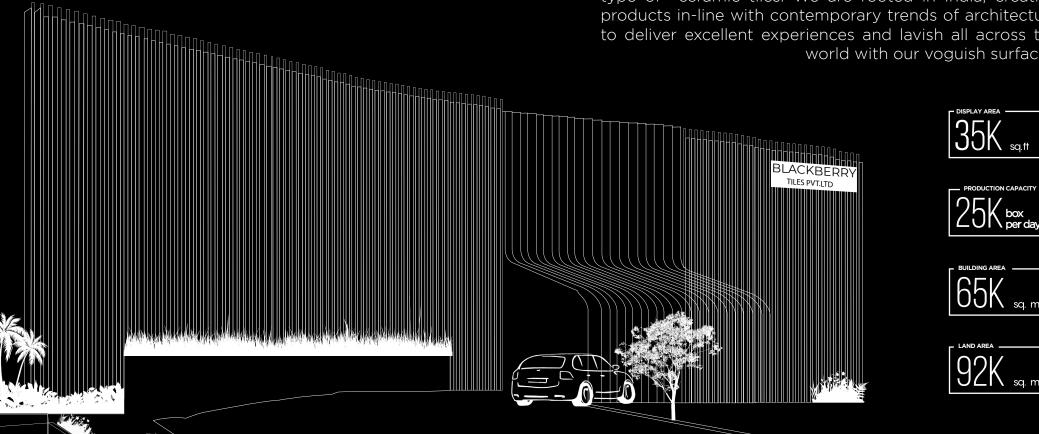











### **EASY TO CLEAN**

Matte surface tiles are exempt from frequent cleaning due to the best concealing of smudges and stains.

# **CHEMICAL RESISTANT**

Our chemical-resistant tiles provide great durability against abrasion, anti-skid qualities for worker safety, and an attractive appearance.

# SCRATCH RESISTANT


When it comes to the scratch resistance feature, it will win the top spot. A Matte surface prevents scratches.


#### FROST RESISTANT

Frost-resistant tiles are not damaged by extremely low temperatures, tile has the ability to endure freeze/thaw temperatures without significant harm.


### STAIN RESISTANT

The most appealing aspect of matt finish tiles is that they require no maintenance.

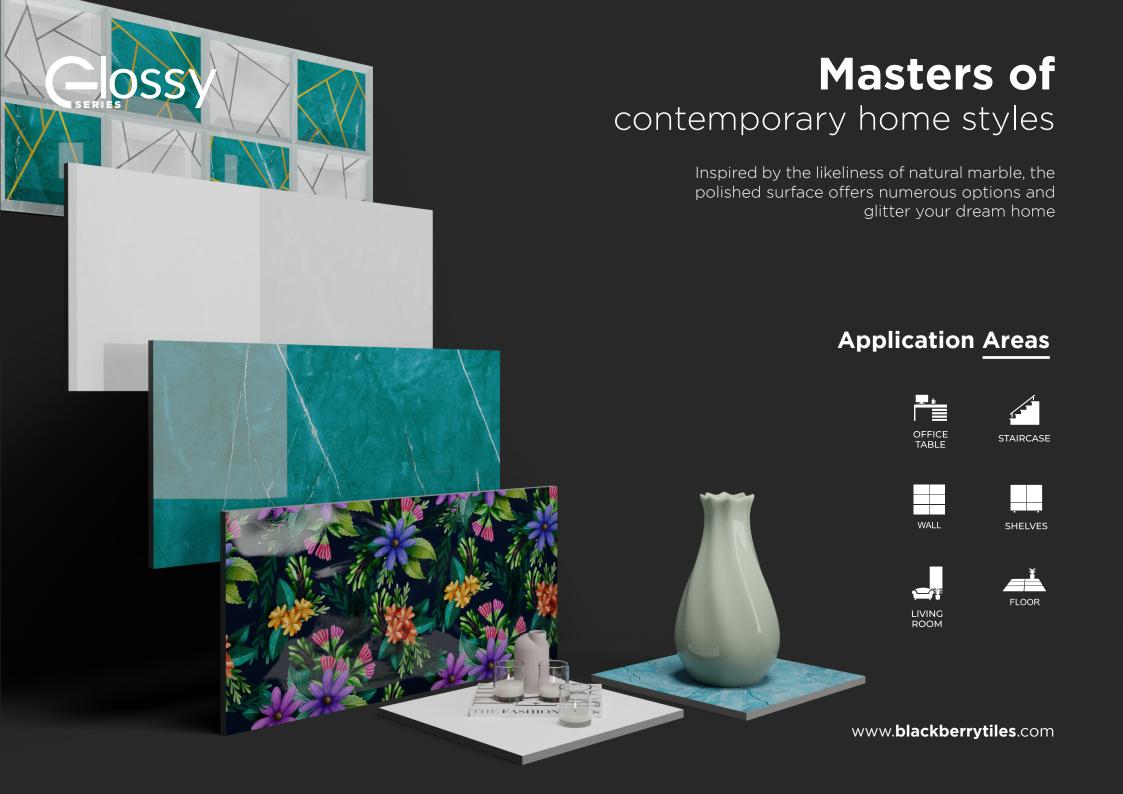

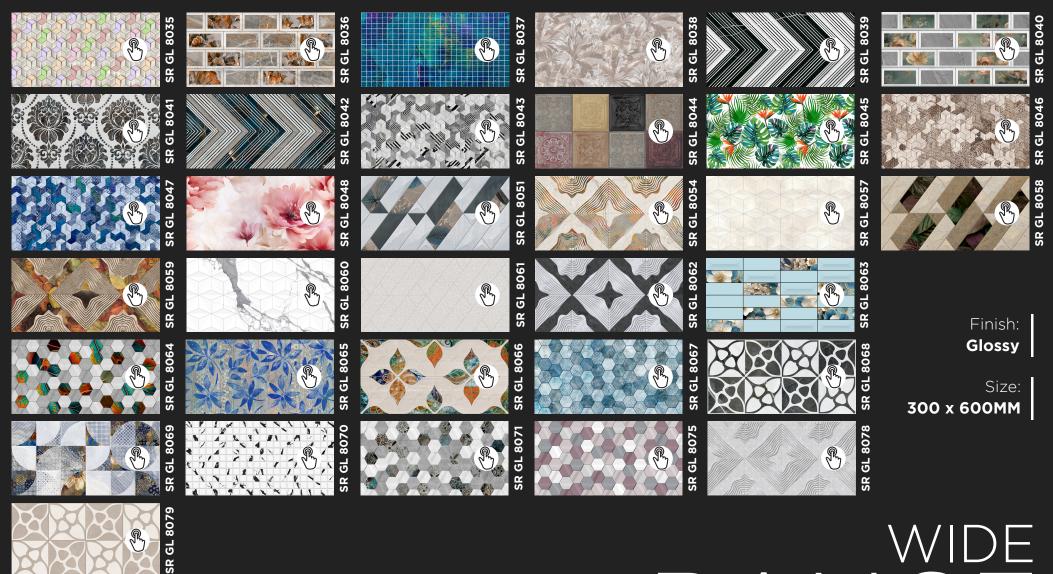

# RANGE

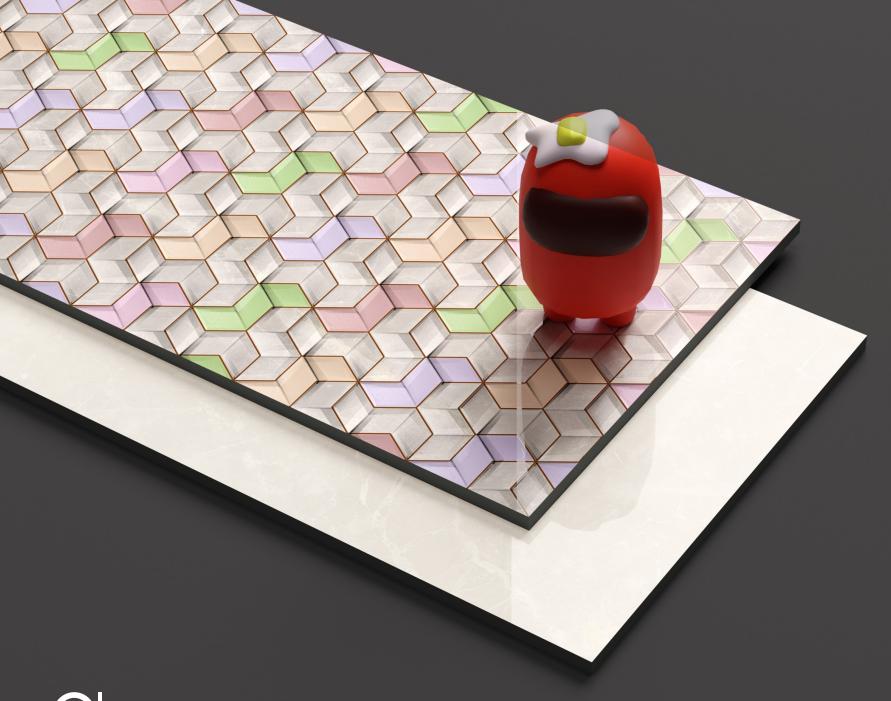



300 x **600MM** 

**C**IOSSY





SR GL 8035

Finish: Size: Randor
Glossy 300 x 600MM 4 face

SR GL 8035 FL Finish: Antiskid Matt 300 x 300mm

SR GL 8035 LT SR GL 8035 HL RANDOM












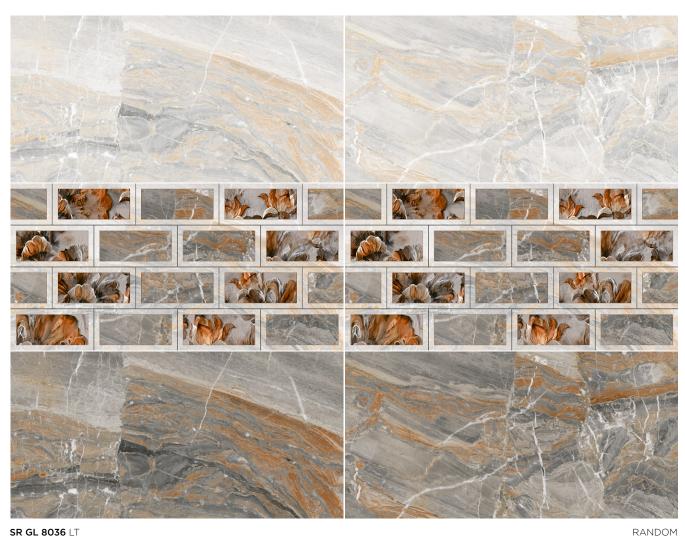

SR GL 8036

inish: Size: F lossy 300 x 600MM

Random: **4 face** 



SR GL 8036 FL Finish: Antiskid Matt

300 x 300mm

SR GL 8036 LT SR GL 8036 HL SR GL 8036 DK








300 x **600MM** 

**C**IOSSY





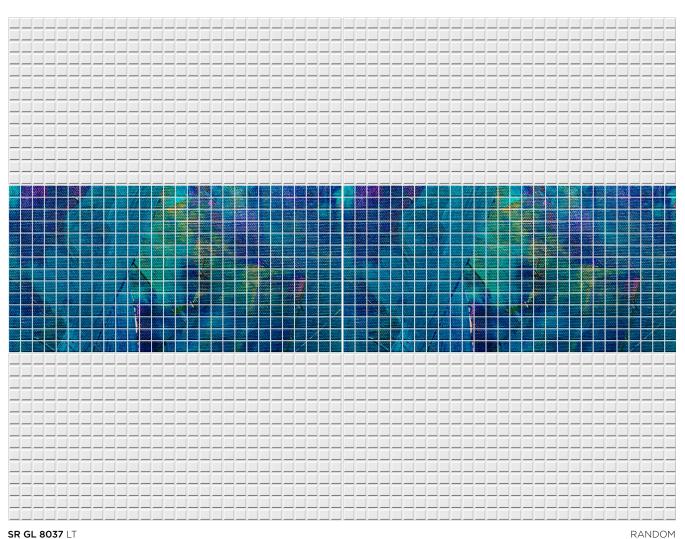

SR GL 8037

Finish: Size: Random: **Glossy** 300 x 600MM 1 face

PLAIN WHITE FL Finish: Antiskid Matt 300 x 300mm









**C**IOSSY





SR GL 8038

Finish: Size: 300 x 600MM Random: 1 face



SR GL 8038 FL 300mm Finish: Antiskid Matt

SR GL 8038 LT SR GL 8038 HL RANDOM













SR GL 8039

Finish: Size: 300 x 600MM

Size: Random: 4 face



SR GL 8039 FL Finish: Antiskid Matt

300 x 300mm

SR GL 8039 LT SR GL 8039 HL

SR GL 8039 DK














SR GL 8040

Finish: Size: 300 x 600MM

Random:



**SR GL 8040** FL Finish: Antiskid Matt

300 x 300mm

**SR GL 8040** LT SR GL 8040 HL SR GL 8040 DK

RANDOM








300 x **600MM** 

CIOSSY





CERAMIC for LUXURY

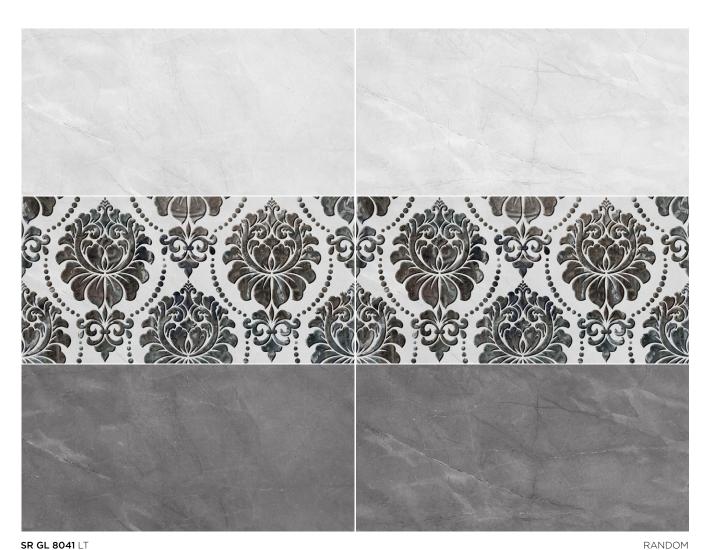

SR GL 8041 FL Finish: Antiskid Matt 300 x 300mm

SR GL 8041

Finish: Si Glossy 300 x

Size: **300 x 600MM** 

Random:



SR GL 8041 HL SR GL 8041 DK












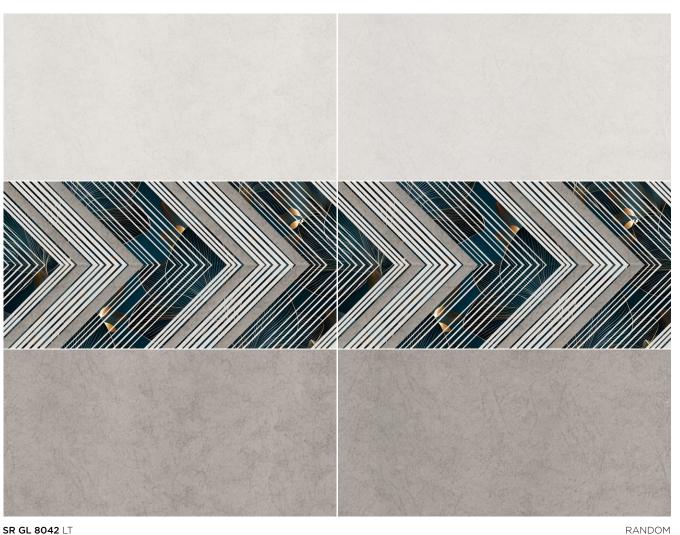

SR GL 8042

Finish: Size: 300 x 600MM



SR GL 8042 FL Finish: Antiskid Matt

300 x 300mm

SR GL 8042 LT SR GL 8042 HL

SR GL 8042 DK












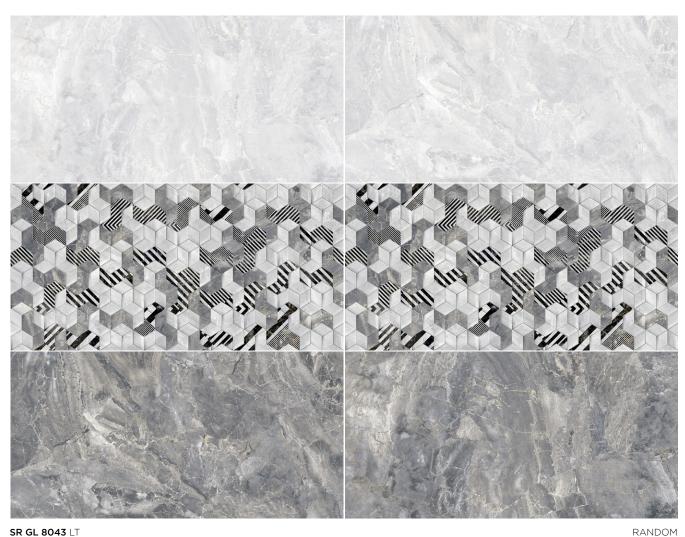

SR GL 8043

Glossy

Size: **300 x 600MM** 

Random: 4 face



SR GL 8043 FL Finish: Antiskid Matt

300 x 300mm

RANDOM

SR GL 8043 HL

SR GL 8043 DK













SR GL 8044

Finish: Size: 300 x 600MM Random:



**SR GL 8044** FL Finish: Antiskid Matt

300 x 300mm

SR GL 8044 LT **SR GL 8044** HL SR GL 8044 DK












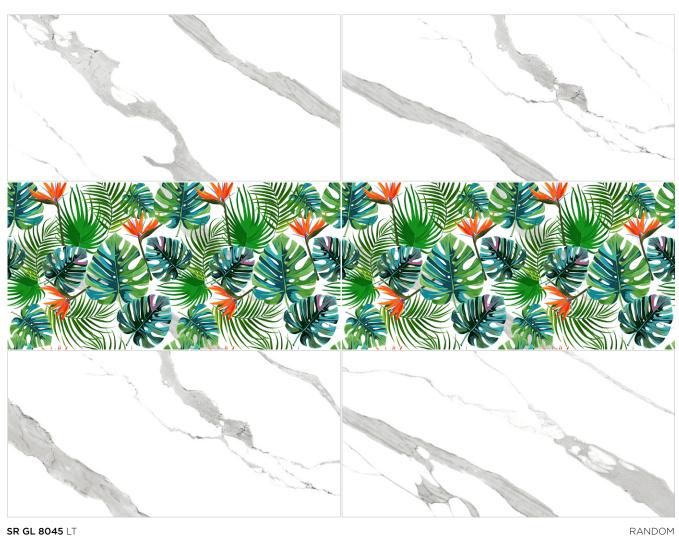

SR GL 8045

Finish: Size: 300 x 600MM

Random:



**SR GL 8045** FL Finish: **Antiskid Matt**  300 x 300mm

SR GL 8045 LT SR GL 8045 HL













SR GL 8046

Finish: **Glossy** 

Size: **300 x 600MM** 

Random:



SR GL 8046 FL Finish: Antiskid Matt


300 x 300mm

SR GL 8046 LT SR GL 8046 HL SR GL 8046 DK

RANDOM

5 HL



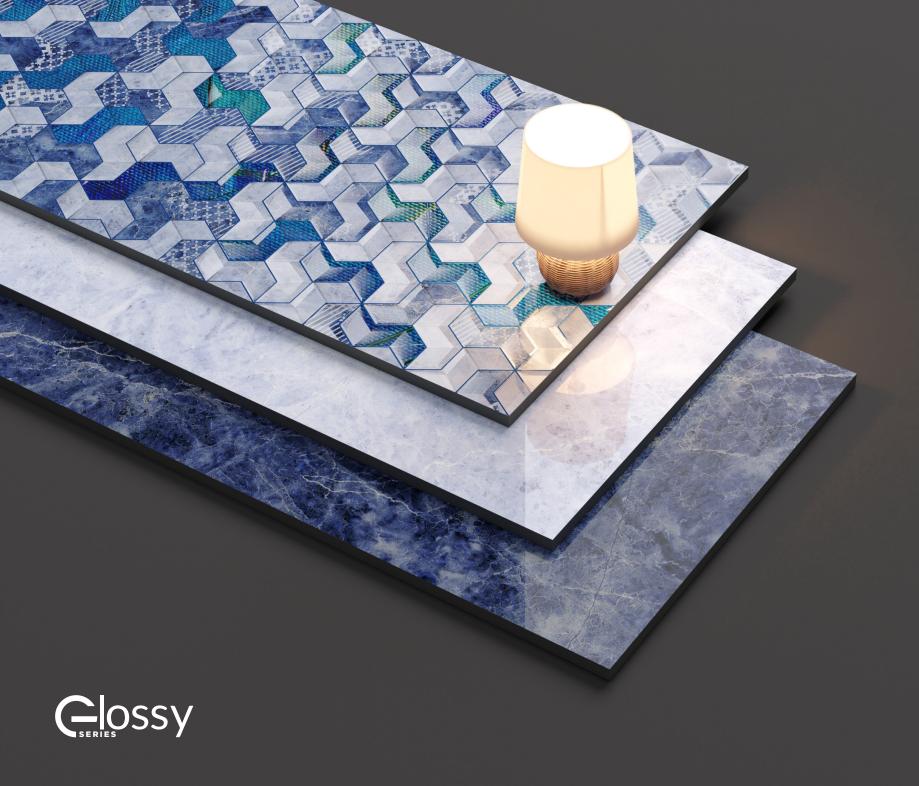










SR GL 8047

Finish: Size: Random: Glossy 300 x 600MM 4 face




SR GL 8047 FL Finish: Antiskid Matt

RANDOM

300 x 300mm

SR GL 8047 LT SR GL 8047 HL SR GL 8047 DK



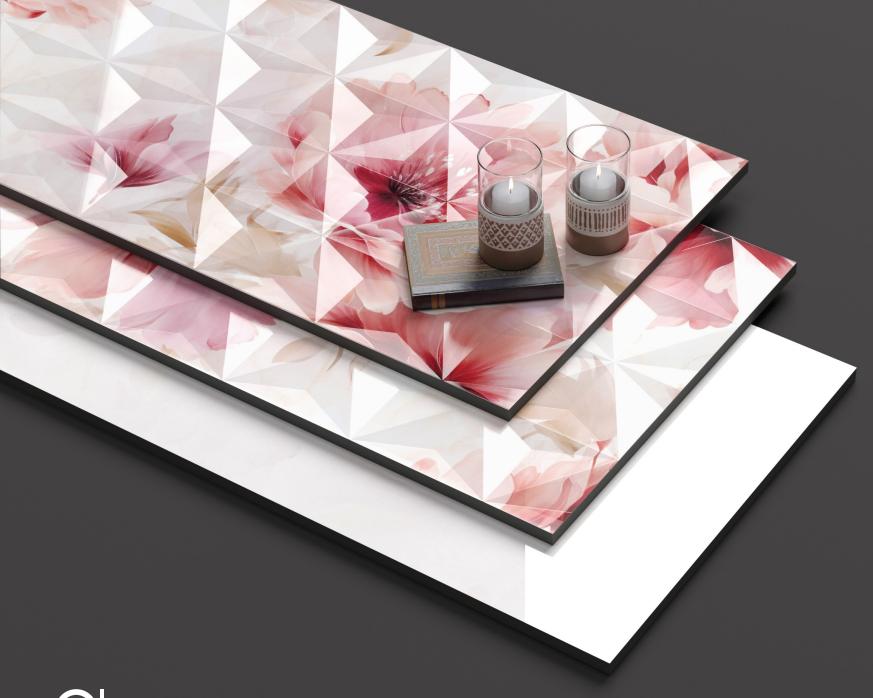



CIOSSY





Random:


2 face

SR GL 8048 Size: **300 x 600MM** Finish:



SR GL 8048 FL Finish: Antiskid Matt

Glossy



300mm

SR GL 8048 LT SR GL 8048 HL 1 SR GL 8048 LT **SR GL 8048** HL 2 RANDOM













SR GL 8051

Finish:

Size: **300 x 600MM** 

Random:



SR GL 8051 FL Finish: Antiskid Matt

300 x 300mm

SR GL 8051 LT SR GL 8051 HL SR GL 8051 DK RANDOM













SR GL 8054

Finish: Si.
Glossy 300 x

Size: **300 x 600MM** 

Random: **4 face** 



SR GL 8054 FL Finish: Antiskid Matt

300 x 300mm

SR GL 8054 LT SR GL 8054 HL

SR GL 8054 DK











SR GL 8057

Finish: Size: Random: Glossy 300 x 600MM 4 face



SR GL 8057 FL Finish: Antiskid Matt

RANDOM

300 x 300mm

SR GL 8057 LT SR GL 8057 HL SR GL 8057 DK













SR GL 8058

Size: **300 x 600MM** 

Random:



RANDOM

Finish: Antiskid Matt

300 x 300mm

SR GL 8058 LT SR GL 8058 HL SR GL 8058 DK













SR GL 8059

Finish: Size: Random: Glossy 300 x 600MM 4 face



SR GL 8059 FL Finish: Antiskid Matt

300 x 300mm

SR GL 8059 LT SR GL 8059 HL








**C**IOSSY







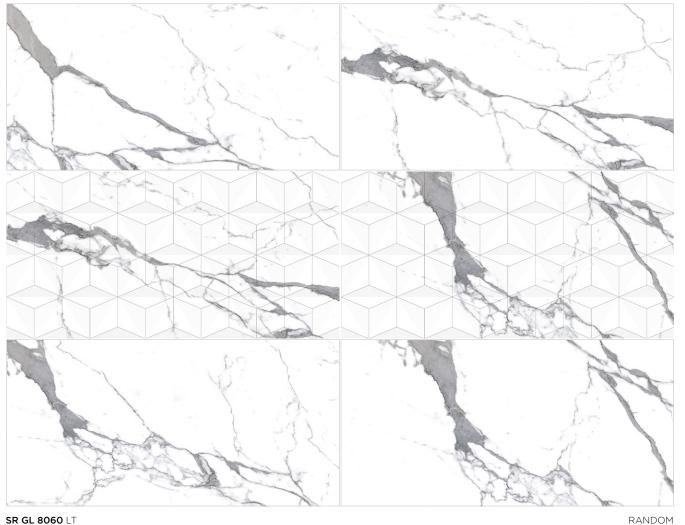

SR GL 8060

Size: **300 x 600MM** Random:



SR GL 8060 FL Finish: Antiskid Matt

300 x 300mm

RANDOM

SR GL 8060 HL








300 x **600MM** 

CIOSSY





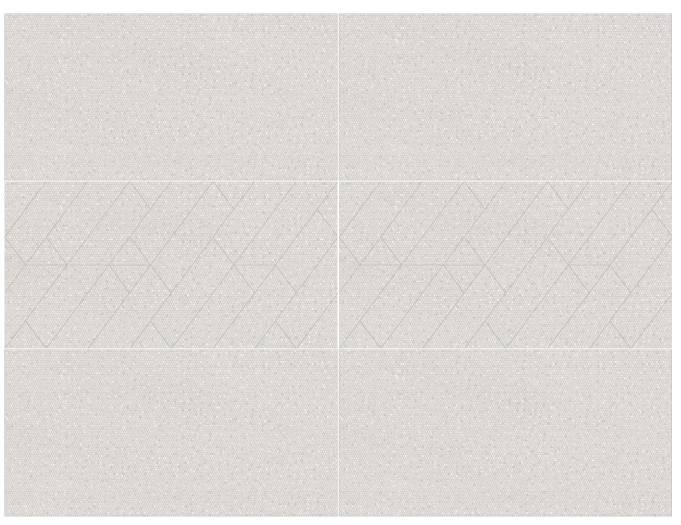

SR GL 8061

 Finish:
 Size:
 Ra

 Glossy
 300 x 600MM
 1

SR GL 8061 FL Finish: Antiskid Matt 300 x 300mm

SR GL 8061 LT SR GL 8061 HL

RANDOM













CERAMIC for LUXURY

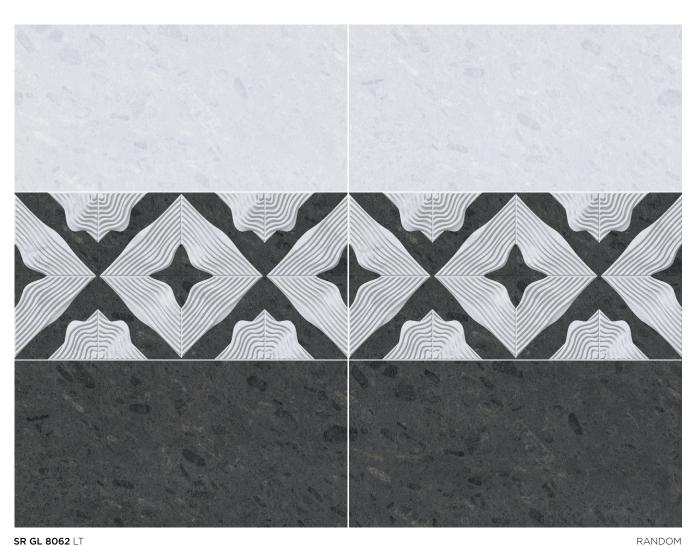

SR GL 8062

Finish: Size: Random: Glossy 300 x 600MM Random:



SR GL 8062 FL Finish: Antiskid Matt

300 x 300mm

SR GL 8062 HL SR GL 8062 DK









**C**IOSSY





SR GL 8063


Size: **300 x 600MM** 

SR GL 8063 FL Finish: Antiskid Matt

300 x 300mm

SR GL 8063 LT SR GL 8063 HL RANDOM



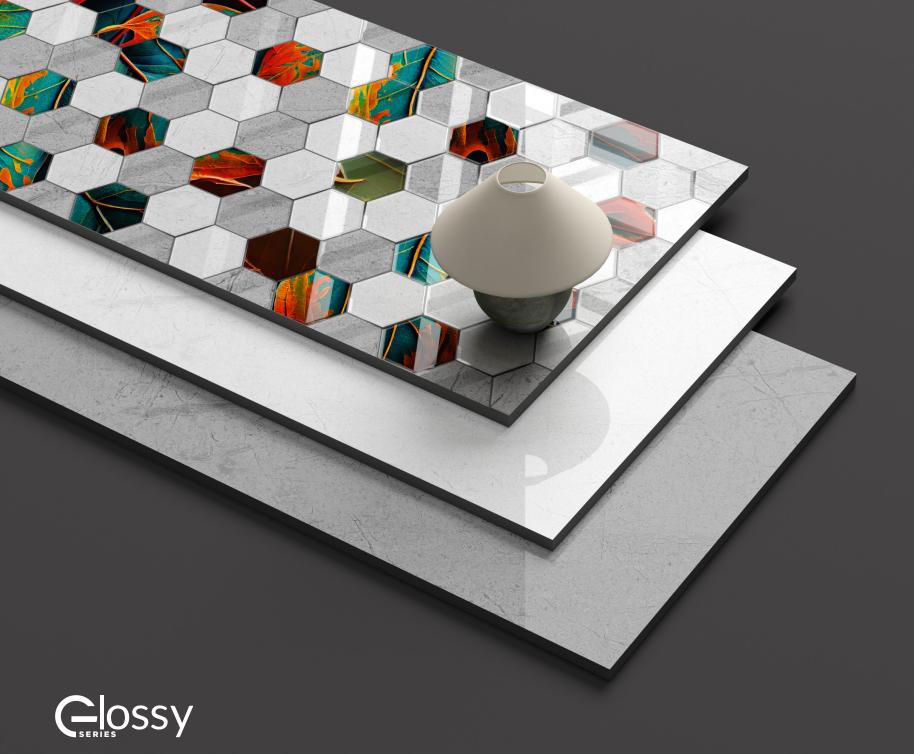








SR GL 8064

Finish: Size: Random: Glossy 300 x 600MM Random:



SR GL 8064 FL Finish: Antiskid Matt

RANDOM

300 x 300mm

SR GL 8064 LT SR GL 8064 HL SR GL 8064 DK











CERAMIC for LUXURY



SR GL 8065

Finish: Size: Random: Glossy 300 x 600MM 1 face



SR GL 8065 FL Finish: Antiskid Matt 300 x 300mm

SR GL 8065 HL SR GL 8065 DK













SR GL 8066

Finish: Size: Random: Glossy 300 x 600MM 1 face




SR GL 8066 FL Finish: Antiskid Matt

300 x 300mm

SR GL 8066 LT SR GL 8066 HL SR GL 8066 DK



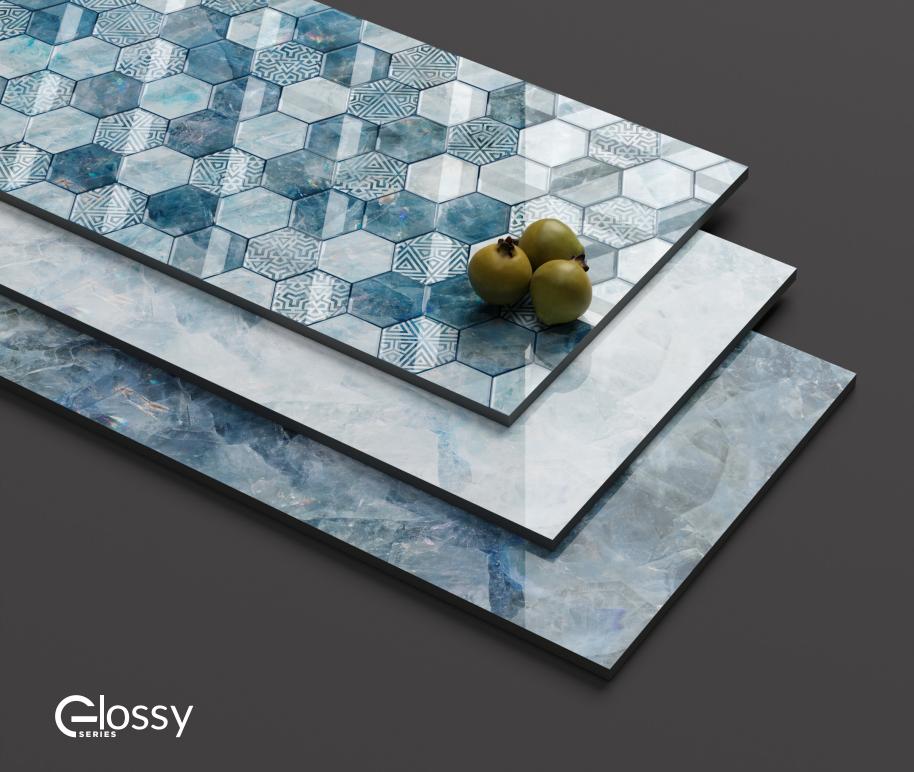










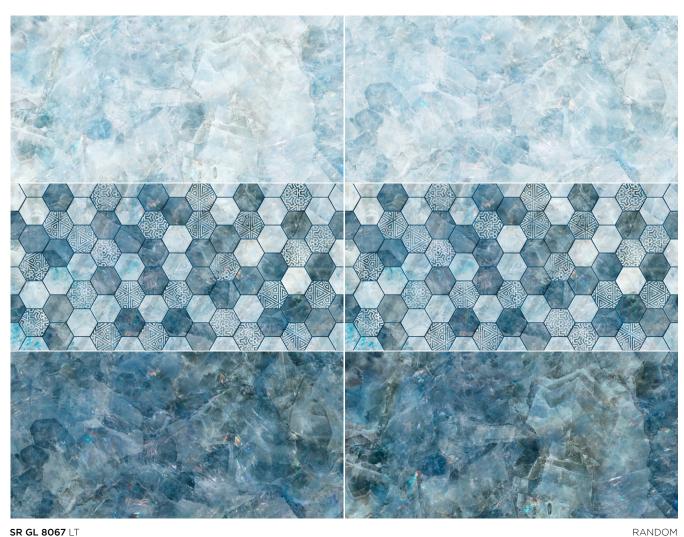

SR GL 8067

Finish: Size: 300 x 600MM

Random: **3 face** 



SR GL 8067 FL Finish: Antiskid Matt 300 x 300mm

SR GL 8067 LT SR GL 8067 HL SR GL 8067 DK













SR GL 8068

Finish: **Glossy** 

Size: **300 x 600MM** 

Random: **4 face** 



SR GL 8068 FL Finish: Antiskid Matt 300 x 300mm

SR GL 8068 LT SR GL 8068 HL SR GL 8068 DK RANDOM













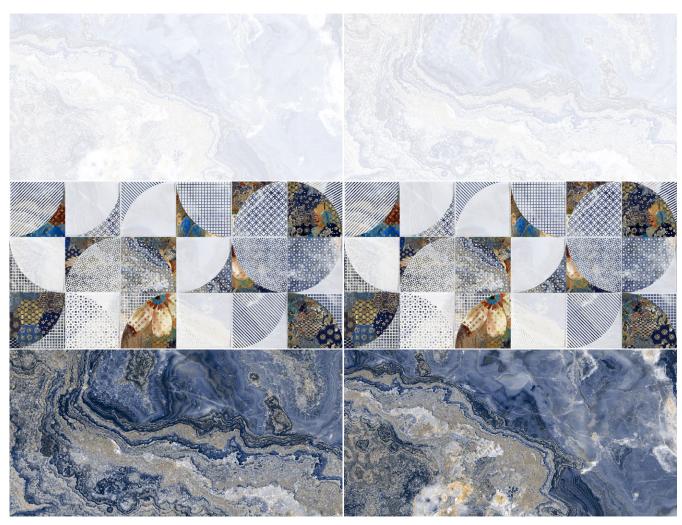

SR GL 8069

Finish: Size: 300 x 600MM

Random: 4 face



RANDOM

SR GL 8069 FL Finish: Antiskid Matt

300 x 300mm

**SR GL 8069** LT SR GL 8069 HL SR GL 8069 DK







300 x **600MM** 

CIOSSY





SR GL 8070


Finish: Random: Glossy 300 x 600MM 1 face

PLAIN WHITE FL Finish: Antiskid Matt

RANDOM

300 x 300mm




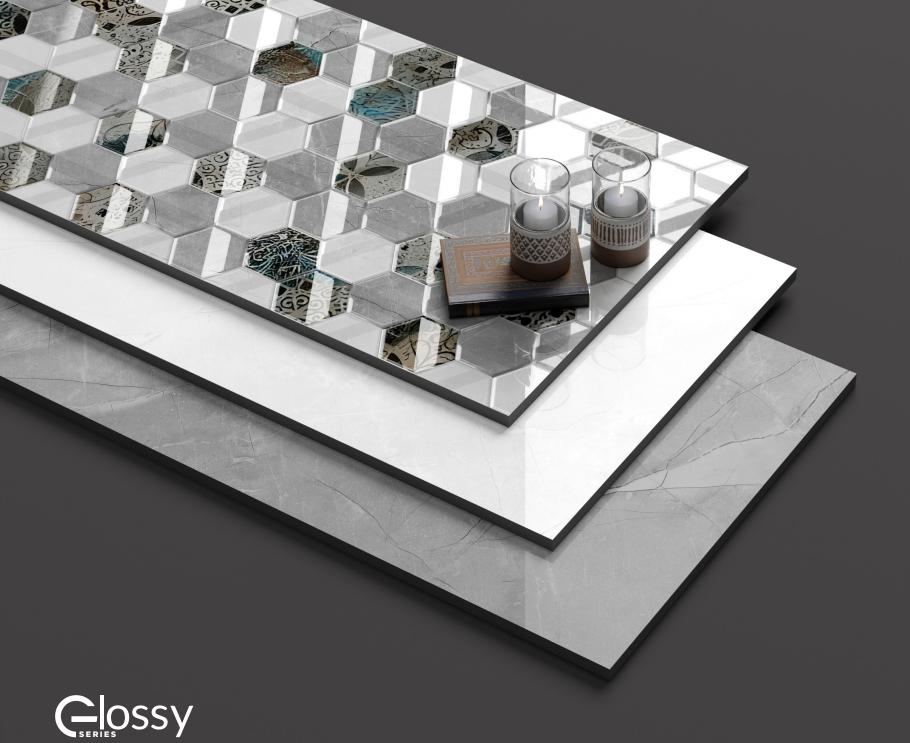







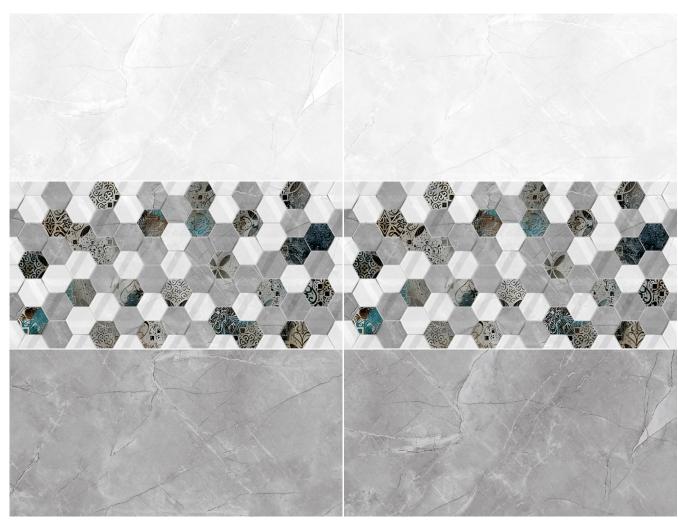

RANDOM

SR GL 8071

Finish:

Size: **300 x 600MM** 


Random: **4 face** 



SR GL 8071 FL Finish: Antiskid Matt 300 x 300mm

SR GL 8071 LT SR GL 8071 HL SR GL 8071 DK



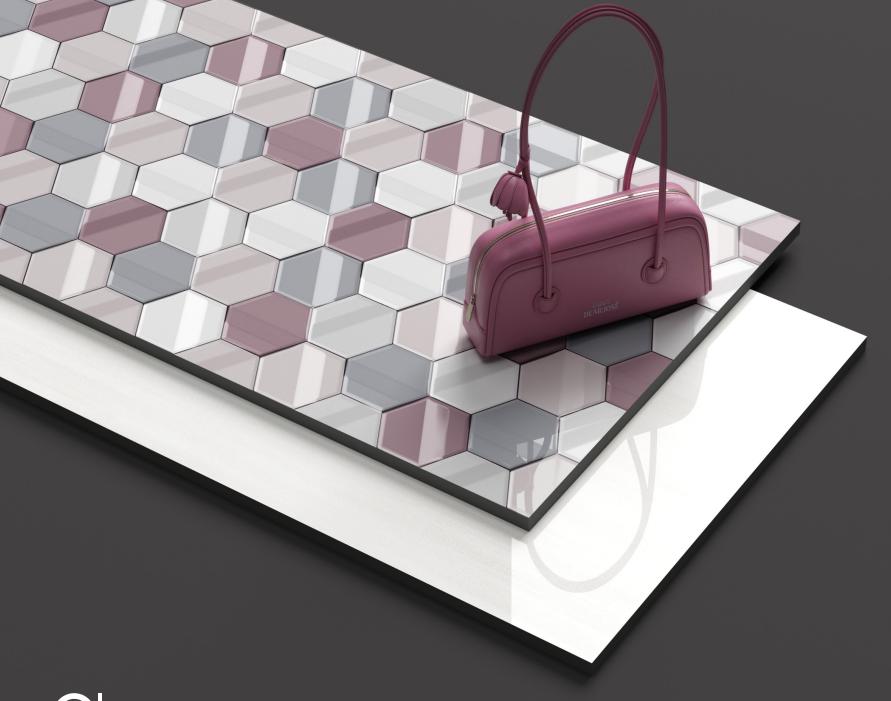




300 x **600MM** 

**C**IOSSY





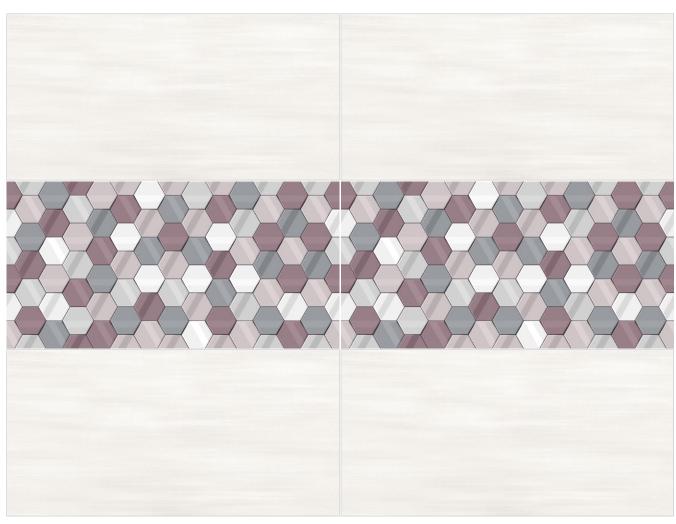

SR GL 8075

inish: Size: Soom 300 x 600MM


Random:



SR GL 8075 FL Finish: Antiskid Matt 300 x 300mm

SR GL 8075 LT SR GL 8075 HL RANDOM



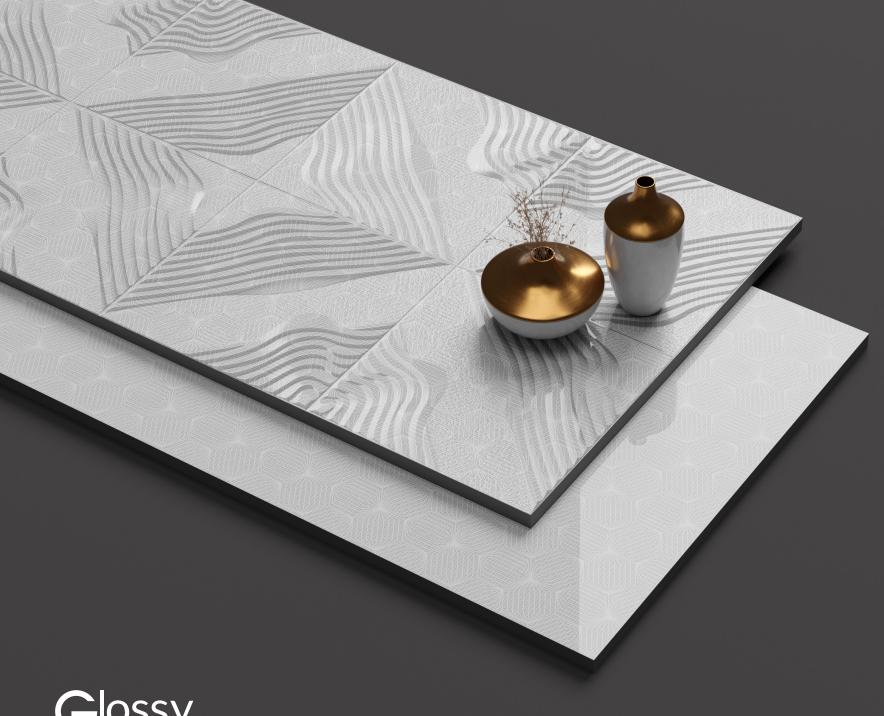



300 x **600MM** 

**C**IOSSY





SR GL 8078

Finish: Size: Random: Glossy 300 x 600MM 1 face

SR GL 8078 FL Finish: Antiskid Matt

RANDOM

300 x 300mm

SR GL 8078 LT SR GL 8078 HL














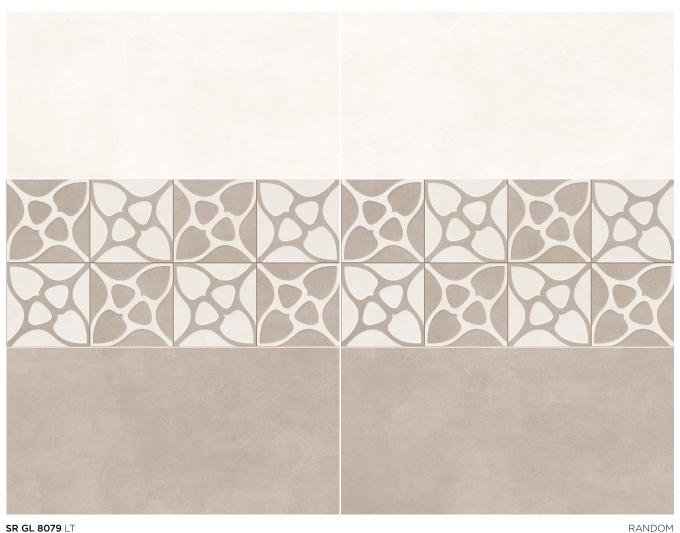

SR GL 8079

 Finish:
 Size:
 Regions

 Glossy
 300 x 600MM
 300 x 600MM

Random:



SR GL 8079 FL Finish: Antiskid Matt 300 x 300mm

SR GL 8079 LT SR GL 8079 HL

SR GL 8079 DK



# Technical Specifications

Sr. No.	CHARACTERISTIC	EURO Standard EN-159/IS13759	BLACKBERRY Value
Dim	ension & Surface Quality		
1	Dimension & Surface Quality	0.5 %	0.4 %
2	Deviation in thickness	0.6 %	0.3 mm
3	Straightness of sides	0.3 %	0.2 %
4	Rectangularity	0.5 %	0.3 %
5	Surface flatness	0.5 %	0.3 %
6	Surface Quality	Min. 95 %	Min. 96 %

Phys	sical Properties		
1	Water Absorption	>0.10%	12-15%
2	Bending Strength	>150 kg./Cm <sup>2</sup>	>150-180 kg./Cm²
3	Scratch Hardness (mohs scale)	Min. 3	Min. 3
4	Crazing Resistance	1 Cycle	No Crazing upto 4 Cycle

Che	emical Properties		
1	Staining Resistance	Min. Class 2	Resistant to all Acids and Alkalies & Household Chemical,
2	Impact Resistance	Min. Class B	except Hydro Flouric Acid

Ther	mo Hydrometric Properties		
1	Thermal Shock Resistance	Resistant 10 Cycle	Conforms
2	Thermal Expansion	Max. 9E-06	Conforms

#### PACKING DETAILS

NOMINAL SIZE	THICKNESS	NO. OF TILES PER BOX	COVERAGE AREA / BOX	WEIGHT PER BOX
300 x 600 mm	09 mm	5 Pcs.	0.90 Sq. Mtr.	14 kg.
300 x 300 mm	09 mm	10 Pcs.	0.90 Sq. Mtr.	14kg.

NOTES: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right of change the specification without prior notice. Sometime variation in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fming instructions in the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed

GENERAL NOTE: Any Complaint must be brought to the company's notice within 10 days of purchase & before fixing of tiles.



CERAMIC Or LUXURY

## Fixing Instructions




### **Tiles Fixing Instructions**

- 1. All the tiles must be checked prior to fixing for quality, batch no. and choice.
- 2. Plaster the surface of the floor to be tiled and allow curing atleast two weeks before tiling.
- 3. While fixing pick tiles from various boxes alternatively, lay them in the desired patterns and make sure that they give an acceptable blend of colour and design. Please note that shade variation is inherent in manufacturing tiles.
- 4. For fixing tiles we recommend to use the fixing adhesives or equivalent product for the best result.
- 5. For fixing tiles in floor using conventional method, we suggest the following laying instruction:
  - A: Use cement and sand mortar in the ratio 1:4. Add water to create a consistent paste.
  - B: Apply 20-25MM of bedding materials over the floor area of 1.0 SQM at a time.
  - C: Apply a thin coat of the slurry on the back of the tile to ensure proper and full bedding. Press gently for even adherence of the tiles with surface.

    Do not use any heavy materials like iron or hammer to press tile.
- 6: For fixing the tools on Dado, we recommend the use of adhesive or equivalent materials.
- 7: Allow 3-4 days of bed curing after Laying tiles and later fill the joints with grout.
- 8: We recommend maintaining a joint gap of 1-2mm between the tiles to allow possible thermal expansion at later stage.
- 9: Please note that company will not accept any liability in case of any problems arising out of adherence of above fixing instructions.



Step-1
Surface Preparation



Step-2
Preparation of Subgrade



Step-3 Laying of tiles on the Surface



Step-4
Post Tiling Work

## Tile Laying, maintenance & Recommendations



### **Cleaning after Laying**

We suggest a good initial cleaning after the laying on the floor or wall, this is very important for removing residual grouting and the normal dirt coming from the building works.

We suggest the use of a cementitious descaler, that is a lightly acid product that doesn't emit fumes that are harmful for the user and that can attack joints. In case of material layed with epoxy or resinous grouting, we recommend to clean after laying with specific detergent.



### **Regular Maintenance**

For a good cleaning of the floor we suggest the use of a natural detergent with a high cleaning power. In case of strong dirty and encrusted by the time, we recommend to consult the following scheme to find the perfect solution to every situation

#### Recommendations

#### **Drying Process**

Once the tiles have been grouted and any excess grout cleaned off, it is important to wait the stipulated time before using the tiled surface; in other words, any cleaning should wait until the tiled surface is completely dry. We recommend waiting 5 days before cleaning in readiness for full use.

### Damage Prevention

Measures should also be taken to protect the newly tiled surface against mechanical or chemical damage resulting from subsequent work by other professionals or later installations. Damage can be prevented by covering the floor tiles with thick cardboard or similar material.

### Protection from Liquid

The newly tiled surface must be protected from water and damp while the adhesive and grouting materials are maturing and hardening. This is particularly important in outside spaces and areas where there is a risk offreezing.

#### **Cleaning Products**

For the final cleaning of the tiled surface, the products used should be compatible with the chemical resistance of the tiles. Avoid solid detergents with abrasive particles and solutions containing hydrofluoric acid, which attacks the glaze and causes irreversible damage to the ceramic tile.

TYPE OF DIRT	PRODUCT
Cement, Kalkstein, metal tracer, rust	Cementitious descaler
Residuals, stains and halos of epoxi joints	Epoxi descaler
Grease, tire marks, colours, marker, etc.	Non soap degrease
Grafitis	Acetone and antigraffiti star

## Size-able Showcase



The intricacies of size and design affect the whole outlook and we understand your concern about the size specifications quite well. Also, the design that's uniform and long-lasting has a greater impact on your investment. Choose Blackberry Tiles and you need not worry about anything. Just let us know what you need

200 X 1800mm 00 X 1600mm 00 X 1200mm 00 X 600mm 00 X 600mm 00 X 450mm 00 X 300mm	GVT GVT GVT CERAMIC WALL TILES	
00 X 1200mm 00 X 600mm 00 X 600mm 00 X 450mm	GVT GVT	
00 X 600mm 00 X 600mm 00 X 450mm	GVT	
00 X 600mm 00 X 450mm		MARKET STATE OF THE RESIDENCE OF THE PARTY O
00 X 450mm	CERAMIC WALL TILES	
00 X 300mm	CERAMIC WALL TILES	1000
	CERAMIC WALL TILES / FLOOR TILES	



## **BLACKBERRY TILES PVT. LTD.**

#### **Admin Office**

Jetpar Pipli Road, Sapar, Morbi-363642. Gujarat - INDIA

Customer Care No.: +91 90999 86724

